



OUTBOARD CYLINDER GROUNDING STRAP

Kit Part# 829300

NOTICE

For Salt Water use, not required for Fresh Water.

Teleflex strongly recommends use of a ground strap on any outboard hydraulic steering cylinder with an exposed shaft (such as Teleflex front mount steering cylinders) where the vessel will be used in salt water. This ground strap will provide added protection against corrosion caused by stray current.

Installation Procedure

- 1 Install ground strap to cylinder as per figure A.
- 2 Attach loose end of ground strap to a good, clean and tight ground location on the engine power head or mid-section.
- 3 Ensure there is enough slack in the strap to allow the engine to pivot freely in ALL trim/tilt positions, throughout the entire steering range of the engine.
- 4 Teleflex recommends the ground strap is secured using zap straps to prevent a tripping or hang-up hazard. There MUST be enough slack to allow full steering articulation in all trim/tilt positions.

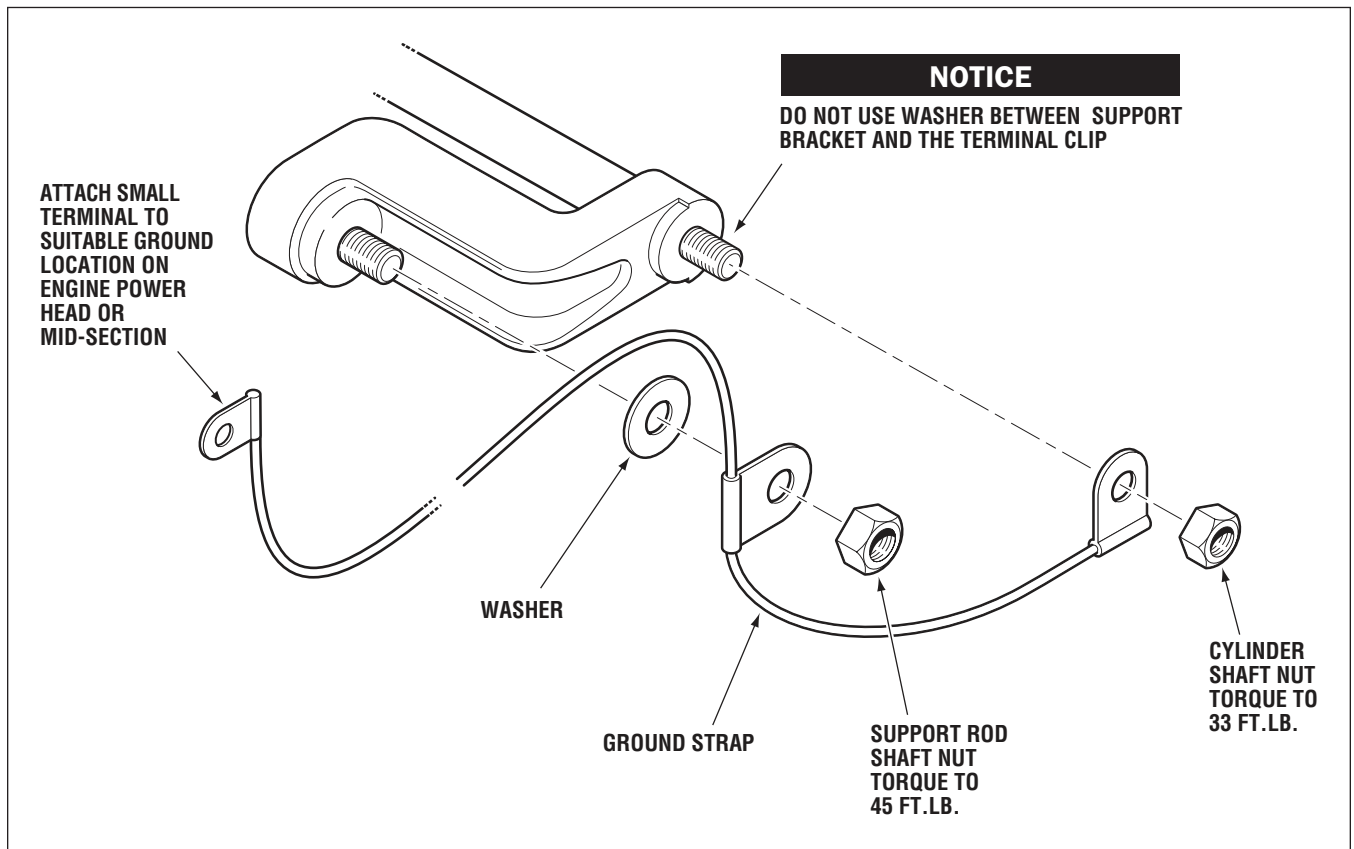


Figure A. SeaStar Pivot and Slide Cylinders.